



PCB SOIL AND HARDSCAPE REMEDIATION NOTES:

- REMOVE SOIL, SAND, STONE, MULCH, TURF, LANDSCAPE FABRIC, ETC. TO 12" DEPTH. DISPOSE OF AS PCB REMEDIATION WASTE <50 PPM.
- REMOVE SOIL, SAND, STONE, MULCH, TURF, LANDSCAPE FABRIC, ETC. TO 24" DEPTH. DISPOSE OF AS PCB REMEDIATION WASTE <50 PPM.
- REMOVE SOIL, SAND, STONE, CONCRETE PADS, TURF, LANDSCAPE FABRIC TO 24" DEPTH. DISPOSE OF AS PCB REMEDIATION WASTE >50 PPM.
- REMOVE CONCRETE PAD, DRAIN SUMP, AND SEDIMENT. DISPOSE OF PCB REMEDIATION WASTE <50 PPM.
- REMOVE CONCRETE PLAZA AND EXPANSION BOARD WITHIN 3'-0" OF BUILDING WALLS / WINDOWS / DOORS. CLEAN CAULK AND EXPANSION BOARD FROM FOUNDATION WALLS. DISPOSE OF AS PCB BULK PRODUCT WASTE.
- REMOVE CONCRETE AND CAULK WITHIN 1'-0" OF BASE OF COLUMN. DISPOSE OF AS PCB BULK PRODUCT WASTE.
- REMOVE PAINTED RETAINING WALL TO 6" BELOW GRADE. DISPOSE OF AS PCB BULK PRODUCT WASTE.
- REMOVE PAINTED METAL HANDRAILS. DISPOSE OF AS PCB BULK PRODUCT WASTE.
- ① TYPICAL ON EAST WING: 5'-0" OVERHANG UNDER FIRST FLOOR SLAB BETWEEN CARRYING BEAM AND FOUNDATION WALL. STONE OVER SOIL INSIDE OF DRIP LINE.

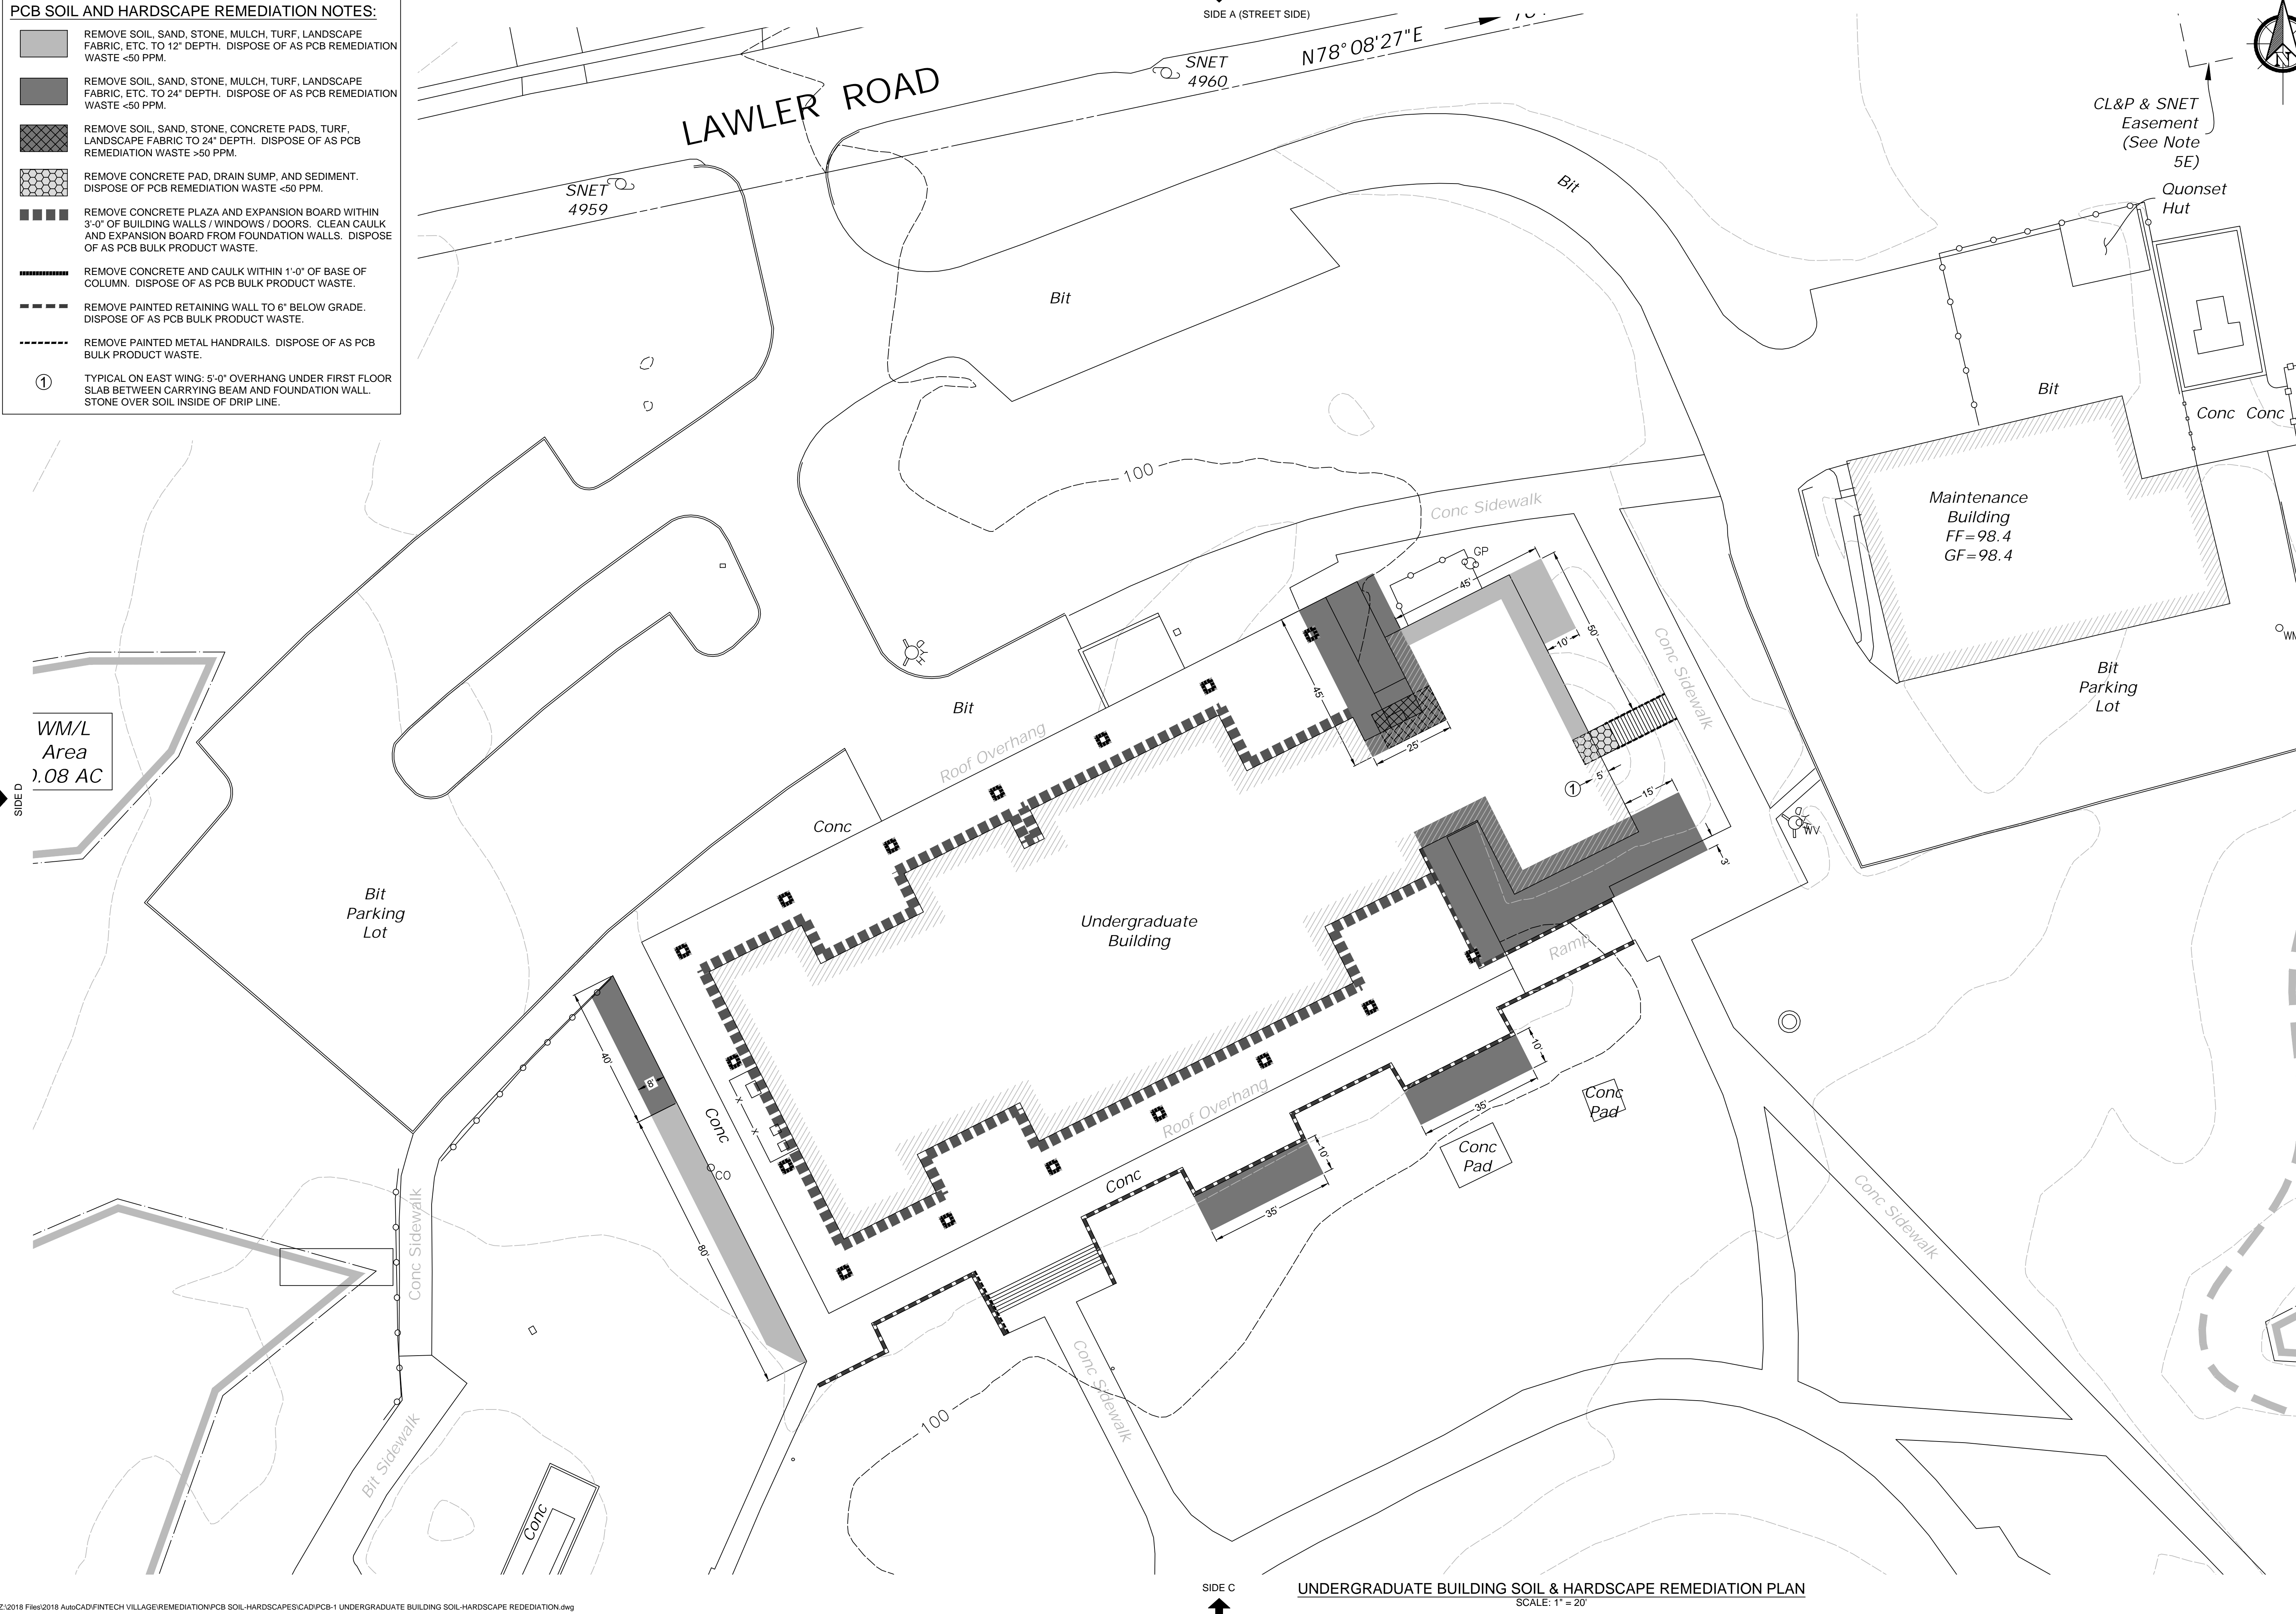

UNDERGRADUATE BUILDING SOIL & HARDSCAPE REMEDIATION PLAN

SCALE: 1" = 20'

SHEET NO. <b>PCB-1</b>	SHEET TITLE:  <b>UNDERGRADUATE BUILDING PCB SOIL &amp; HARDSCAPE REMEDICATION</b>	<div><div><b>EAGLE</b> <i>Environmental, Inc.</i></div><div>8 SOUTH MAIN STREET, SUITE 3 TERRYVILLE, CONNECTICUT 06786 860-589-8257</div></div>	PROJECT CLIENT AND ADDRESS:  <b>FINTECH VILLAGE, LLC</b>  <b>1800 ASYLUM AVENUE WEST HARTFORD, CONNECTICUT</b>  CONSULTANT'S SEAL	PROJECT TITLE:  <b>PCB CLEANUP AND DISPOSAL PLAN SOIL AND HARDSCAPES</b>	REVISIONS			
					NO.	DATE	DESCRIPTION	
		DATE: 05/01/2019		DRAWN BY: BB				
		SCALE: AS NOTED		REVIEWED BY: PF				
		PROJECT NO.: 19-071-0014						
SHEET 1 OF 4								